


# AVRii SOL

## MODULES

Avrii SOL Opti-Power PRO  
WB-465

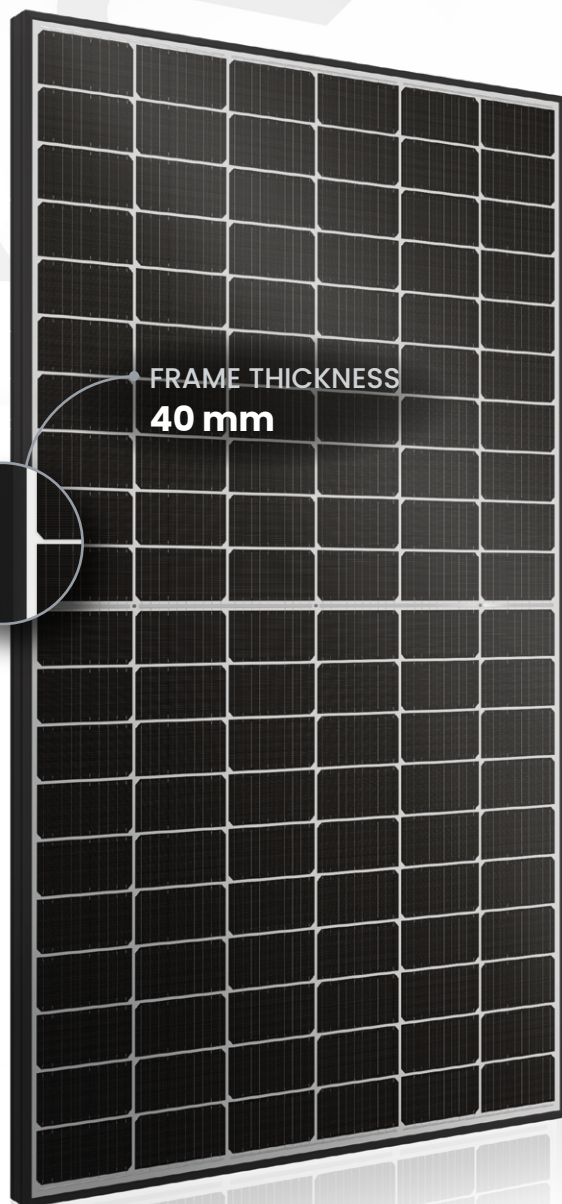

FRAME THICKNESS  
40 mm



High-efficiency PERC monocrystalline HALF-CELLS



Exceptional weather resistance



Quick and easy assembly

Maximum efficiency 21,28 %



PID resistance



Linear performance warranty  
20 Years Product Warranty  
25 Years Linear Power Warranty



More than  
*energy*



EUROPEAN  
PRODUCER

# Avrii SOL Opti-Power PRO MODULES

## Avrii SOL Opti-Power PRO WB-465

ELECTRICAL PARAMETERS STC	WB-465
Nominal power [Wp]	465
Short-circuit current [A]	13,83
Maximum power current [A]	13,19
Open-circuit voltage [V]	41,88
Maximum power voltage [V]	35,27
Efficiency [%]	21,28


STC: Irradiance 1000 W/m<sup>2</sup>, Air mass 1.5 AM, Cells temperature 25 °C.  
Measurement tolerance STC ± 2 %.

ELECTRICAL PARAMETERS LIC	WB-465
Nominal power [Wp]	88,76
Short-circuit current [A]	2,72
Maximum power current [A]	2,57
Open-circuit voltage [V]	39,00
Maximum power voltage [V]	34,62

LIC: Irradiance 200 W/m<sup>2</sup>, Air mass 1.5 AM, Cells temperature 25 °C.  
Measurement tolerance STC ± 5 %.

TEMPERATURE PARAMETERS	WB-465
Current temperature coeff.	0,046%/°C
Voltage temperature coeff.	-0,259%/°C
Power temperature coeff.	-0,324%/°C

### LINEAR POWER WARRANTY

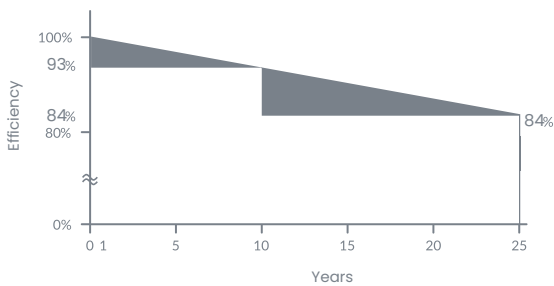

### PRODUCT CERTIFICATIONS


IEC 61215, IEC 61730

CE Declaration of Conformity



OPERATING PARAMETERS	WB-465
Power tolerance	0/+1%
Safety class	II
Maximum system voltage	1000/1500 VDC
Operating temperature	-40 to +85 °C
Reverse current protection	25 A
MECHANICAL PARAMETERS	WB-465
Length [mm]	1920
Width [mm]	1138
Height [mm]	40
Weight [kg]	24,5
COMPOSITION	WB-465
Front glass	3,2 mm, Tempered
Encapsulant	EVA film
Frame	Anodised aluminium, black
Cells	Monocrystalline, Class A
Cells quantity	120
Junction box	IP68, 3 by-pass diodes
Cables	2 x 1100 mm, $\phi = 4 \text{ mm}^2$
Connectors	MC4 compatible, IP68
ENDURANCE PARAMETERS*	WB-465
Maximum Snow Load	7000 Pa
Maximum Wind Load	4000 Pa
Hail Endurance	$\phi = 55 \text{ mm}$ , $V=122 \text{ km/h}$
PACKING	WB-465
Packing system	Carton box 2,0 x 1,25 x 1,2
Quantity	26 Pcs/Pallet
Transport	26 Pallets/Truck

\*Results obtained from internal tests.

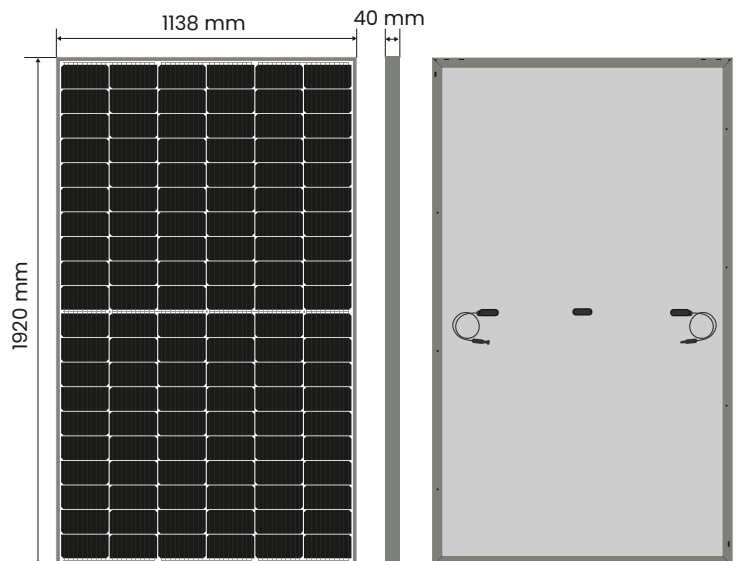

The technical sheet contains information valid as of the date specified in the document revision. Due to ongoing research and the introduction of new products, Avrii reserves the right to make any changes to these parameters without prior notice.

Datasheet\_EN\_AvriiSOL\_Opti-Power\_PRO\_Module\_WB-465\_Rev1.3\_28.02.2024

# AVRII

Avrii Sp. z o. o., Mroźna 8, 33-102 Tarnów, Poland  
+48 14 696 88 89 (6)  
info@avrii.eu



avrii.eu



Management System  
ISO 9001:2015  
ISO 14001:2015  
ISO 45001:2018  
www.avrii.com  
ID: 500002905